


DS-2CE16C2P(N)-IT3

720 TVL PICADIS Outdoor IR Bullet Camera




EXIR

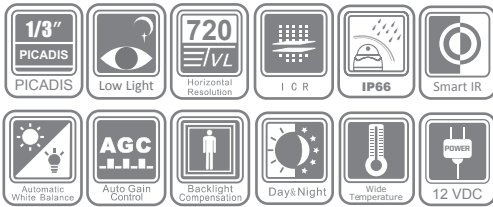

Key features

- 1/3" PICADIS
- EXIR Technology
- True Day/Night
- 720 TVL Horizontal Resolution
- 40m IR Distance
- Smart IR
- IP66 Weatherproof
- Wide Operating Temperature Range

Dimensions

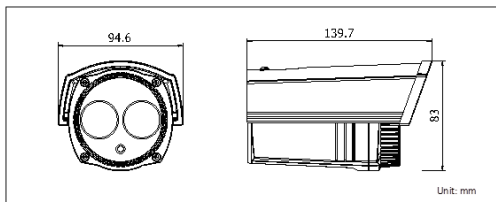

Accessories



DS-1212ZJ
(Wall Mount)



DS-1214ZJ
(Pole Mount)



DS-1215ZJ
(Pole Mount)

DS-2CE16C2P(N)-IT3	
Camera	
Image Sensor	1/3" PICADIS
Signal System	PAL/NTSC
Effective Pixels	1280(H)×960(V)
Min. Illumination	0.1 Lux @ (F1.2, AGC ON), 0 Lux with IR 0.3 Lux @ (F2.3, AGC ON), 0 Lux with IR
Shutter speed	PAL: 1/25 s to 1/10,000 s NTSC: 1/30 s to 1/10,000 s
Lens	12mm @ F2.3 (3.6mm,6mm,8mm,16mm optional), Angle of view: 22.62° (12mm)
Lens Mount	M12
Day & Night	IR cut filter with auto switch
Horizontal Resolution	720 TVL
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 62 dB
General	
Working Temperature/Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 VDC
Power Consumption	Max. 5 W (Max. 8.5 W with IR cut filter on)
Ingress Protection	IP66
IR Range	40 meters
Dimensions	Φ 94.6×83×139.7mm(Φ 3.72"×3.27"×5.5")
Weight	600 g (1.32 lbs)

Available models

PAL: DS-2CE16C2P-IT3
NTSC: DS-2CE16C2N-IT3